

technica



Operation instructions Refrigerator

Models:

461067



Thank you for choosing and purchasing our product. Please carefully read the operation instructions before use for a correct application and satisfactory effect. This appliance compliance with the requirement of directive 2006/42/EC. .

Contents

General

Structure and Parts

Handle and Erection

Preparation and Power Supply

Use and Caution

Maintenance

Trouble Shooting

Principle of Refrigeration System


Circuit Diagram

Major Parameters

General

1. Top brand fully enclosed compressor is used on the desk-top refrigerator. The refrigerant R600a is of an environmentally friendly agent. It features a rational configuration of refrigeration system with blower forced air cooling. The temperature is quite even inside the refrigerator.
2. Double hollow transparent glasses are used on door and body. It features an artistic and elegant appearance, perfect perspective and easy access.
3. It has a wide application in department store and house as well as the meeting room and sitting room

Structure and Parts

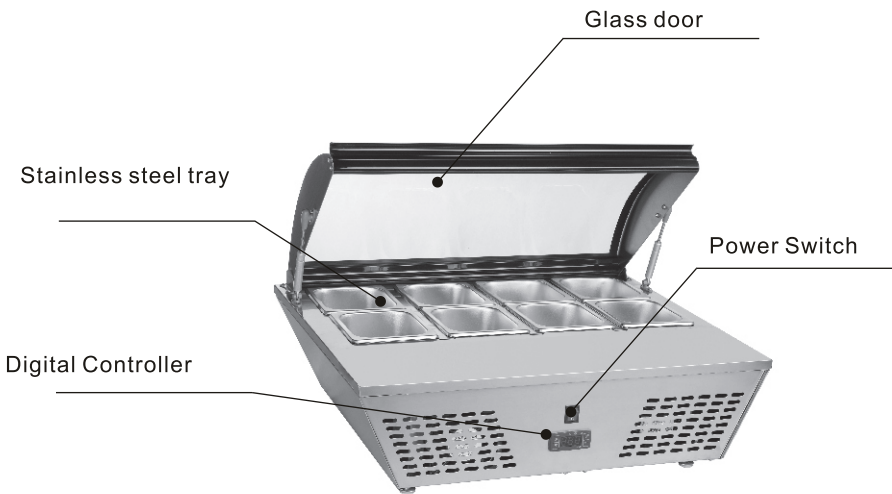

Handle and Erection

Handle with care

Unplug the wall socket first.

Never tilt it over 45 degree during handling

Dry place

Always locate the refrigerator at a dry place.

Sufficient space

The distance from both sides and back of refrigerator to wall or other substance must not less than 10cm. The refrigeration capability might be decreased if its surround space is too small to circulate air.

Well ventilation

Always locate the refrigerator at a place with fine ventilation. For the first time use, wait for 2 hours after handling and then plug the wall socket and start it.

Far from heat source

Never place the refrigerator directly under the sunshine. Never locate it nearby any heat source or heater to prevent it from reducing refrigeration capability.

No heavy load

Never put any heavy load on the top of the refrigerator.

No hole making

Never make hole on the refrigerator. Never install other matter on the refrigerator.


Stable location

To avoid the unexpected noise and vibration, Unpacking and locate the refrigerator on a flat and solid place.

Preparation and Power Supply

Exclusive power socket

Normally, the power supply should be 220-240V, single phase AC with exclusive single phase three pin receptacle (250V 10A) and fuse (6A). The power receptacle must have a reliable earth connection.



No share on socket

Never let the refrigerator share the common socket with other appliance, otherwise the cable becomes hot and fire might be resulted.

Protect cables

Never break or damage the cables otherwise current leakage and fire might be resulted.

No water flushing

Never give the refrigerator surface a flush otherwise current leakage might be resulted.

Prevent from flammables and explosive

Never put any flammable or explosive inside the refrigerator such as ether, gasoline, alcohol, adhesive and explosive. Never put dangerous product nearby the refrigerator.

No spray

To spray the flammables such as paint or coating nearby the refrigerator is not allowed, otherwise fire might be resulted

After power break

After power break or unplugging the refrigerator, always wait at least 5 minutes and then you may plug the refrigerator and start it again.

No medicine

No medicine is allowed to keep inside the refrigerator.


Use and Caution

1. Before use:

Plug the refrigerator on 220-240V~ exclusive socket.

After the refrigerator running, put hand on the air suction to confirm it is sufficient cold. Then you may put food inside the cold box.

2. Digital Temperature controller



Features Of Function

It is a mini-sized and integrated intelligent controller and applicable to the compressor of one Hp.

The main functions are: Temperature Display/ Temperature Control/ Manual, automatic defrost by burning off/ Illumination Control/ Value Storing/ self Testing/ parameter Locking

Front Panel Operation

- Set temperature
 - Press „set“ button, the set LED temperature is displayed.
 - Press ▽ or △ button to modify and store the displayed value.
 - Press „set“ button to exit the adjustment and display the cold-room temperature.
- If no more button is pressed within 10 seconds, the cold-room temperature will be displayed.
- Illumination: Press (light icon) button, it lights; Press (light icon) again, it stops.
 - Manual start/stop defrost: Press button and hold for 6 seconds to defrost or stop defrost.
- Refrigerant LED: During refrigeration, the LED is on; When the cold room temp. is constant, the LED is off; During the delay start, the LED flashes.
- Defrost LED: during defrosting, the LED is on; When is stops defrosting, the LED is off, During the delay display of defrost, the LED flashes.
- Digital controller reset
 - When display shows "Disorder", press ▽ button for 2s until buzzer rings, quickly press △ button for 6s until buzzer rings again, the display will flash for 3s and it restores factory setting.

3. Cautions

- Shorten the door open time and reduce open frequency is good to keep a cold temperature inside the refrigerator.
- Never block the air suction and outlet. Keep air circulation and refrigeration capability.
- Do not make food congested as it will influence the cooling effect. Adjust the rack height for proper food storage.
- Cool the hot food down to room temperature before you put it into the refrigerator.

Products in the refrigerator should be stored on trays, plates, boxes, containers or other articles intended for food contact. It is not advisable to place food directly on the refrigerator elements for long periods of time exceeding 24 hours. Do not store food in a refrigerated display case that is switched off.

- Try to reduce the open times and keep refrigerator inside cold in case the power is cut off.
- Only skilled service man is allowed to repair the damaged power cable with special tools.
- Never touch compressor to avoid from scald.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- The operation manual are not suitable for the persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge.
- Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.
- The A-weighted emission sound pressure level does not exceed 70 dB(A).
- The maximum loading of the Shelf does not exceed 18kg.
- The climatic class of the appliance is 4, the Units are suggested to be used at 16°C –32°C ambient temperature.
- To avoid damages or other problems, this product can not be put or stored with any corrosive food.
- WARNING: Keep ventilation openings, in the appliance enclosure or in the built-in structure, clear of obstruction.
- WARNING: Do not use mechanical devices of other means to accelerate the defrosting process, other than those recommended by the manufacturer.
- WARNING: Do not damage the refrigeration circuit.
- WARNING: Do not use electrical appliances inside the food storage compartments of the appliance, unless they are of the type recommended by the manufacturer.

Maintenance

1. Notice

- Often keep the refrigerator clean and periodical maintenance is necessary.
- Always unplug the socket before maintenance
- Never use damaged plug or loose socket to prevent from electric shock or short circuit.
- Never flush the refrigerator. Never use alkali detergent, soap, gasoline, acetone or brush.

2. Clean outside

- Dip soft cloth in neutral detergent(tableware detergent) to clean the outside of the refrigerator and then wipe it with dry soft cloth.

3. Clean inside

- Take rack out for cleaning with water

4. Shut down refrigerator for a long time

- Take all food out and unplug the wall socket.
- Clean both inside and outside of the refrigerator thoroughly and open the door for sufficient dry.
- The glass breaks easily. Keep the glass far from children.
- Clean the condensate tray and wipe it dry

5. Replacement of lamp in the light box

- If the LED is damaged, it must be replaced by the manufacturer, its service agent.

Trouble Shooting

Trouble	Cause and Remedy
No refrigeration	<ul style="list-style-type: none">• Is the plug in socket well?• Is the fuse broken?• Is there no power?
Unsatisfactory refrigeration	<ul style="list-style-type: none">• Is it under the sunshine?Is there any heat source nearby?• Is the surrounding ventilation bad?• Does the door close well?Does door open for a long time?• Is the door seal strip deformed or damaged?• Is food congested or too much?• Does food block the air suction or outlet?• Regulate the temperature controller.
Much noise	<ul style="list-style-type: none">• The refrigerator does not level.• The refrigerator contacts wall or other matter.• There is loose part in refrigerator.

Contact local service agent for help if simple trouble shooting does not solve the problems.

Note


Following phenomena are not troubles

The murmur of water is heard when the refrigerator is working. It is a normal phenomenon as the coolant is circulating in the system.


In wet season, condensation might be found on the outside of the refrigerator. It is not a trouble, which is caused by high humidity. Simply use cloth to wipe it.

Principle of Refrigeration System

The principle of compression refrigeration consists of “compression”, “condensation”, “throttling” and “vaporization”. The compression is undertaken by compressor, the condensation is completed by condenser, the throttling valve is executed by capillary and the vaporization is implemented by evaporator. When the coolant is circulating in the closed refrigeration system, the compressor sucks coolant, which has absorbs heat in evaporator, the coolant becomes a high pressure and high temperature gas. In condenser, it dissipates heat in air, while the coolant is re-liquefied and throttled in capillary and then enters into evaporator with low pressure. The liquefied coolant quickly boils and vaporizes into gas when the pressure suddenly drops. Meanwhile, it absorbs heat inside the refrigerator. And the compressor sucks the low pressure and low temperature gaseous coolant. It is circulating in this way up to realization of intended refrigeration.

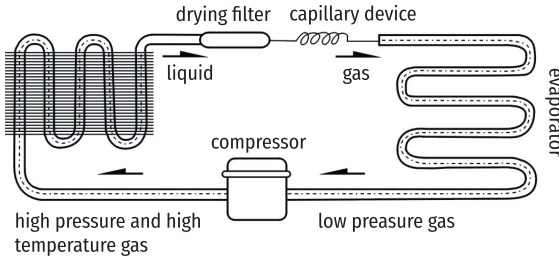

Circuit Diagram

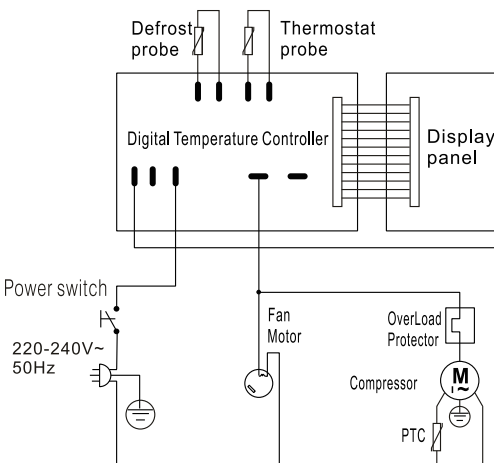

Major Parameters

Model	461067
Coolant and injection quantity	R600a(40)
General Rated Input Power (W)	105
Kind of weather	4
Refrigeration temperature (°C)	2-12
Electric shock protection class	I
Rated Voltage (V)	220-240~
Rated Frequency (Hz)	50
Rated Current (A)	0.7
Foaming agent	Cyclopentane
Total effective volume (L)	67
Net weight (kg)	25
Overall dimension (mm)	767x612x328

Note

1. The electric circuit diagram and parameters on the product name plate are final ones if they have been changed.
2. The design might be improved without notice.
3. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.



Warning; Risk of fire / flammable materials

Refrigerant is facility burning of R600a, please protect against fire



Meaning of crossed out wheeled dustbin:

Do not dispose of electrical appliances as unsorted municipal waste, use separate collection facilities.

Contact you local government for information regarding the collection systems available.

If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.

EC Declaration of Conformity

In accordance with the Machinery Directive 2006/42/EC, annex II, no. 1 A

Manufacturer: TECHNICA GROUP spółka z ograniczoną odpowiedzialnością sp. k.
Address: ul. Miłosna 2, Ochaby Małe, 43-430 Skoczów
Machinery name: Refrigerator
Type: 461067

Complies with all the following European Directives:

- Directive 2006/42/EC of the European Parliament and of the Council of 17 May 2006 on machinery, and amending Directive 95/16/EC, (OJ L 157, 9.6.2006, p. 24-86)

Complies with the following other European Directives and/or relevant provisions:

- Directive 2014/30/EU of the European Parliament and of the Council of 26 February 2014 on the harmonisation of the laws of the Member States relating to electromagnetic compatibility, (OJ L 96, 29.3.2014, p. 79-106)
- Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (OJ L 174, 1.7.2011, p. 88-110)
- Regulation (EC) No 1935/2004 of the European Parliament and of the Council of 27 October 2004 on materials and articles intended to come into contact with food and repealing Directives 80/590/EEC and 89/109/EEC, (OJ L 338, 13.11.2004, p. 4-17)
- Commission Regulation (EC) No 2023/2006 of 22 December 2006 on good manufacturing practice for materials and articles intended to come into contact with food, (OJ L 384, 29.12.2006, p. 75-78)
- Commission Delegated Regulation (EU) 2019/2018 of 11 March 2019 supplementing Regulation (EU) 2017/1369 of the European Parliament and of the Council with regard to energy labelling of refrigerating appliances with a direct sales function, (OJ L 315, 5.12.2019, p. 155-186)

For the evaluation of the compliance with this Directive, the following harmonized standards:

EN 60335-1:2012 + AC:2014 + A11:2014 + A13:2017

EN 60335-2-89:2010 + A1:2016 + A2:2017

EN 61000-6-3:2007 + A1:2011 + AC:2012

EN 61000-6-1:2007

Meets the requirements of the other technical standards and specifications:

EN 62233:2008

Name and address of the person authorized to compile the technical file, who must be established in the Community:

Ruben Bujok

ul. Miłosna 2, Ochaby Małe

43-430 Skoczów, Poland